

N E W R A N G E

EXPERIENCE



ECO DESIGN
2 0 2 2

X **AXIS**
CHEMINÉES FOYERS POÊLES

AXIS OFFERS YOU A NEW BUILT'IN FIREPLACE RANGE

EXPERIENCE

Brick interior / Contemporary design

AVAILABLE SINGLE SIDED / DOUBLE SIDED / LATERAL GLASS / 3 SIDED

- 
- 10 years warranty*
 - ECODESIGN 2022
 - High performance due to DOUBLE FLOW fire grid
 - 2 esthetics finishing: back striped cast iron or with beige or grey bricks optional
 - Durability and ergonomics with the new door system
 - Choise of 3 dimensions: 80 - 100 100 - 120 cm

**see waranty conditions in the unit manual*

EXPERIENCE

S I N G L E S I D E D 8 0 / 1 0 0 / 1 2 0

XP 80 SINGLE SIDED

Ref XP0080SF



back with beige bricks





grey bricks option



back cast iron option

Nonimal output	12 kW
Efficiency	76 %
CO Emission (%CO to 13% O2)	0,10 %
Particles - Dust emission (mg/Nm ³ at 13% O2)	30 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	118 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	86 mg/Nm ³
Flue exit	Ø 200
Logs' maximum lengths	40 cm
Weight	290 kg
Energy efficiency class	A

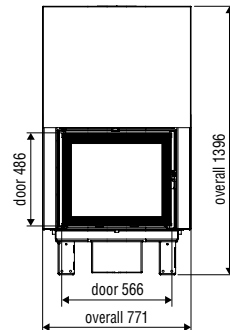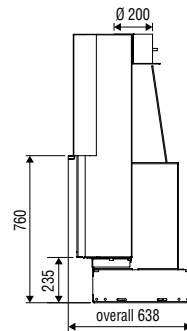

XP 100 SINGLE SIDED

Ref XP0100SF



back with beige bricks





grey bricks option



back cast iron option

Nonimal output	14 kW
Efficiency	75 %
CO Emission (%CO to 13% O2)	0,10%
Particles - Dust emission (mg/Nm ³ at 13% O2)	30 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	118 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	102 mg/Nm ³
Flue exit	Ø 230
Logs' maximum lengths	50 cm
Weight	325 kg
Energy efficiency class	A

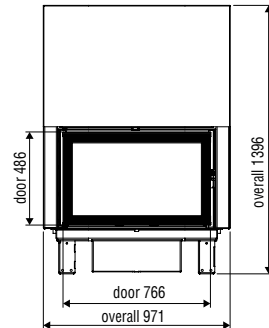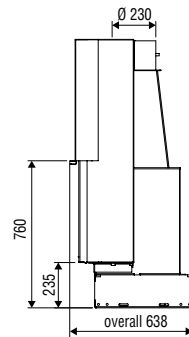

XP 120

SINGLE SIDED

Ref XP0120SF





grey bricks option



back cast iron option

Nonimal output	16 kW
Efficiency	75 %
CO Emission (%CO to 13% O2)	0,08 %
Particles - Dust emission (mg/Nm ³ at 13% O2)	27 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	68 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	102 mg/Nm ³
Flue exit	Ø 230
Logs' maximum lengths	50 cm
Weight	360 kg
Energy efficiency class	A



EXPERIENCE

SINGLE SIDED 80 / 100 / 120

XP 80

SINGLE SIDED

RIGHT OR LEFT

Ref XP0080LD / LG





grey bricks option



back cast iron option

Nonimal output	12 kW
Efficiency	76 %
CO Emission (%CO to 13% O2)	0,10 %
Particles - Dust emission (mg/Nm ³ at 13% O2)	30 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	118 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	86 mg/Nm ³
Flue exit	Ø 200
Logs' maximum lengths	40 cm
Weight	290 kg
Energy efficiency class	A

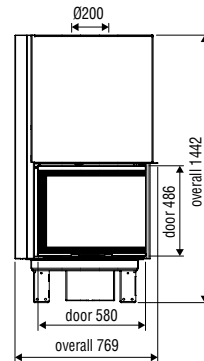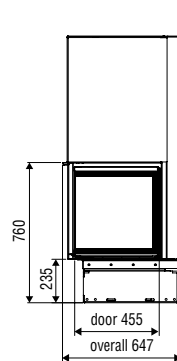

XP 100

SINGLE SIDED

RIGHT OR LEFT

Ref XP0100LD / LG



back with beige bricks





grey bricks option



back cast iron option

Nonimal output	14 kW
Efficiency	75 %
CO Emission (%CO to 13% O2)	0,10 %
Particles - Dust emission (mg/Nm ³ at 13% O2)	30 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	118 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	102 mg/Nm ³
Flue exit	Ø 230
Logs' maximum lengths	50 cm
Weight	325 kg
Energy efficiency class	A

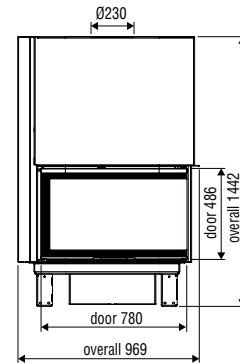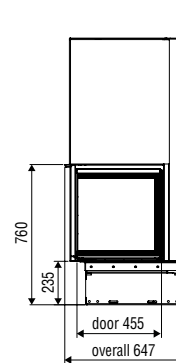

XP 120

SINGLE SIDED

RIGHT OR LEFT

Ref XP0120LD / LG





grey bricks option



back cast iron option

Nonimal output	16 kW
Efficiency	75 %
CO Emission (%CO to 13% O2)	0,08 %
Particles - Dust emission (mg/Nm ³ at 13% O2)	27 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	68 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	102 mg/Nm ³
Flue exit	Ø 230
Logs' maximum lengths	50 cm
Weight	360 kg
Energy efficiency class	A

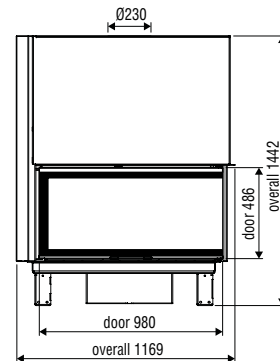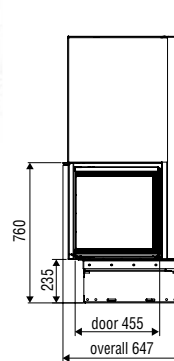

EXPERIENCE

3 SIDED 80 / 100 / 120

XP 80

3 SIDED

Ref XP00803V



back with beige bricks




grey bricks option



back cast iron option

Nonimal output	12 kW
Efficiency	76 %
CO Emission (%CO to 13% O2)	0,10 %
Particles - Dust emission (mg/Nm ³ at 13% O2)	30 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	118 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	86 mg/Nm ³
Flue exit	Ø 200
Logs' maximum lengths	40 cm
Weight	290 kg
Energy efficiency class	A

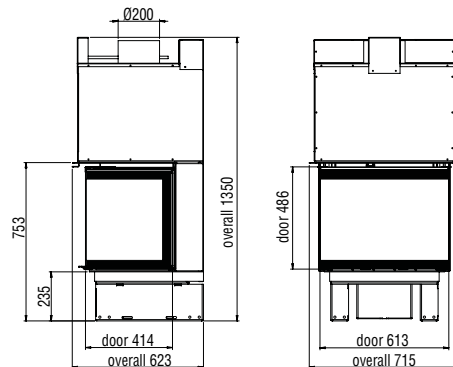

XP 100

3 SIDED

Ref XP01003V





grey bricks option



back cast iron option

Nonimal output	14 kW
Efficiency	75 %
CO Emission (%CO to 13% O2)	0,10 %
Particles - Dust emission (mg/Nm ³ at 13% O2)	30 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	118 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	102 mg/Nm ³
Flue exit	Ø 230
Logs' maximum lengths	50 cm
Weight	325 kg
Energy efficiency class	A

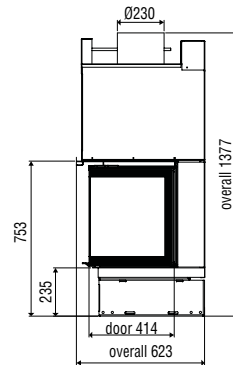

XP 120

3 SIDED

Ref XP01203V



back with beige bricks





grey bricks option



back cast iron option

Nonimal output	16 kW
Efficiency	75 %
CO Emission (%CO to 13% O2)	0,08 %
Particles - Dust emission (mg/Nm ³ at 13% O2)	27 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	68 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	102 mg/Nm ³
Flue exit	Ø 230
Logs' maximum lengths	50 cm
Weight	360 kg
Energy efficiency class	A

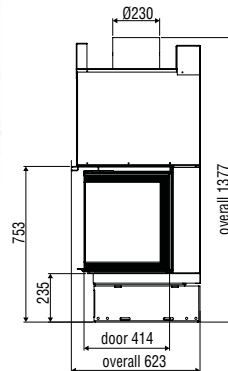



EXPERIENCE

DOUBLE SIDED 120

XP 120

DOUBLE SIDED

Ref XP0120DF





grey bricks option



back cast iron option

Nonimal output	16 kW
Efficiency	75 %
CO Emission (%CO to 13% O2)	0,08 %
Particles - Dust emission (mg/Nm ³ at 13% O2)	27 mg/Nm ³
Nitrogen oxide (NOx) at 13% O2 (mg/Nm ³)	68 mg/Nm ³
Organic Gazeus Compounds (OGC) at 13% O2	102 mg/Nm ³
Flue exit	Ø 230
Logs' maximum lengths	50 cm
Weight	360 kg
Energy efficiency class	A



EXPERIENCE



This catalogue presents the Axis range, which is available on the French market. Certain products may not be available in some foreign markets, particularly outside the EEC.

Installation work must comply with the national and local regulations in force, as well as the recommendations indicated in the instructions supplied with the device.

As part of its policy of continuous product improvement, Groupe Seguin reserves the right to make changes or alterations to products at any time. The advertised dimensions, colours and characteristics of the appliances are subject to change depending on technical requirements. In order to improve its products and the quality of its services, Groupe Seguin reserves the right to modify its models without notice.

The classifications of heating appliances are given on the date of printing of the catalogue and are subject to changes in the eligibility criteria of the "Flamme Verte" charter.

This document is not contractually binding. July 2021. Groupe Seguin Catalogue 2021. All translation and reproduction rights reserved. Every effort has been made to ensure that the contents of this document are accurate and current on the date of printing. This document was created based on pre-production and prototype products.

SAS CHEMINEES SEGUIN DUTERIEZ
with share capital of € 485,043.35 - RCS 332 651 595
ZI de Lhérat - 63310 RANDAN
Tel +33 (0)4 70 56 16 00 - Fax +33 (0)4 70 56 16 09

Mock up : GROUPE SEGUIN - JULY 2021
Photos : 3D Render - Valencia



www.cheminees-axis.com